



1186220

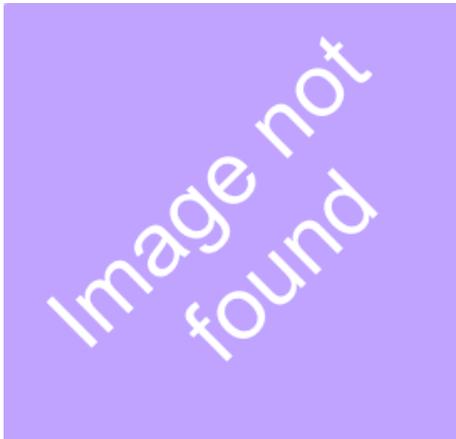

DESCRIPTION

GENERAL INFORMATION

SAP Material No (Virgin Material)	11862200000
Material type (Virgin Material)	PA 6.6/6
SAP material number	1186220
Material type (Recyclate)	Leer
Colour description	black
Length A	43,5 mm
Height C	40,5 mm
Width B	19,2 mm
Number of poles	8
Outlet form	A

TECHNICAL PROPERTIES

Nominal width	10
Weight	5 g
Chemical resistance	Alcohol, weak alkalis, solvents, fuels, mineral oils, grease/oils
Temperature resistance	-40°C up to +130°C
General Tolerance	UL94 HB
Water resistance	Supports IPX9K impermeability

PERFORMANCE INDICATOR

Assembly force	on request
Pull-off force	on request
Abzugskraft vom Stecker (-40°C) (Nm)	on request
Pull-off force Corrugated tube (N)	on request



Further details, sizes and designs:
<https://www.poeppelmann.com/en/k-tech/browse>

SUITABLE FOR

Manufacturer/ Connector family

Hirschmann 1.2 SealStar

Connector no.

805-031-531

CO₂ FOOTPRINT OF THE PRODUCT

Material type (Virgin Material)	PA 6.6/6
THG Virgin material total	39,90
Material type (Recyclate)	Leer
Material description (Recyclate)	-
THG PIR total	6,15
Saving	84,59%

Sum of all GHG emissions for the product:

Product carbon footprint consideration "cradle-to-gate" (Pöppelmann).

The estimation of the greenhouse gas footprint is based on different values and data with varying quality and accuracy. We are guided by DIN EN ISO 14067 and the GHG Protocol.

PACKAGING

Basic unit standard packaging	2.200
VPA per product carrier	12

ADVANTAGES



SCHUTZ VOR STAUB
UND SCHMUTZ



OPTIMALE NUTZUNG
DES BAURAUMS



INTUITIVE MONTAGE



SCHUTZ DER LEITUNGEN



REDUZIERUNG VON
SCHWINGUNGEN



EINSATZ AUF ENGSTEM
RAUM

FURTHER INFORMATION

Customs item number 39269097

Production DE Germany



Further details, sizes and designs:
<https://www.poeppelmann.com/en/k-tech/browse>